


3804 RELAY CARD

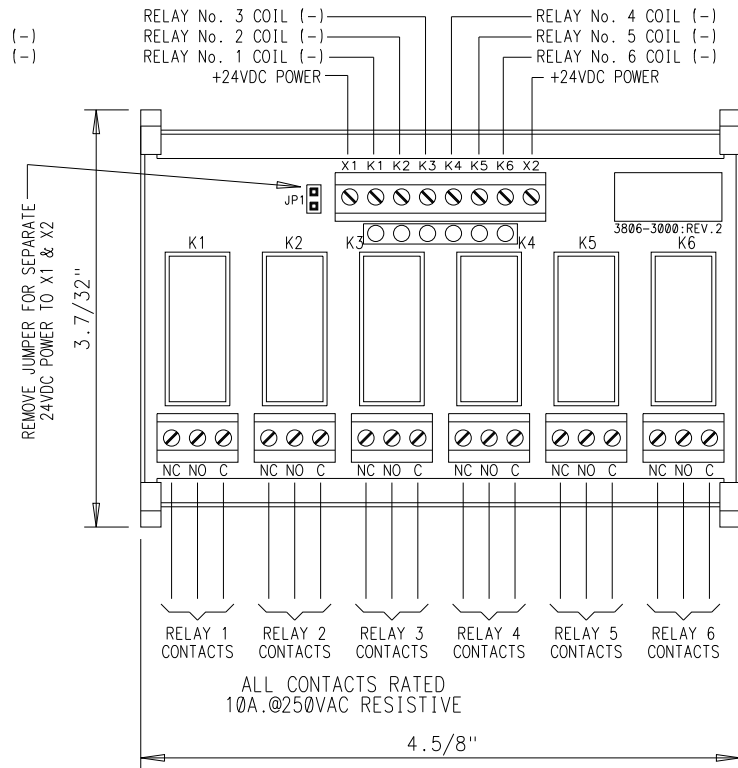

3806 RELAY CARD

NOTES

1. RELAYS ARE PLUG-IN TYPE WITH 24VDC COILS @ 22mA CURRENT DRAW
2. CIRCUIT BOARDS ARE EQUIPPED WITH COIL SUPPRESSION DIODES
3. FACTORY JUMPER CAN BE REMOVED FOR MULTIPLE SOURCE POWER
4. RELAYS ARE ACTIVATED BY CONNECTING COIL WIRE TO VOLTAGE COMMON
5. RELAY CARDS WILL MOUNT ON 35mm DIN RAIL

REV.	DATE	DESCRIPTION
2	05/10/08	REVISED RELAY MOUNTINGS
1	03/29/95	ADDED NEW RELAY BASE & REVISED 4 SPDT UNIT

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF ESSEX ENGINEERING CORP. IT SHALL NOT BE DUPLICATED, REPRODUCED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF ESSEX ENGINEERING CORP.

OUTLINE DRAWING & SCHEMATIC
for
RELAY INTERFACE MODULES
4 SPDT; 6 SPDT / 24VDC RELAYS

		ESSEX ENGINEERING CORPORATION 21 INDUSTRIAL DRIVE - IVYLAND, PENNSYLVANIA 18974 - (215)322-5880	
DWG. BY	WAS	CK. BY	REV. BY
DATE	11/29/90	APP. BY	SCALE NONE
DWG. NO. 3804-5000		REV. 2	
SHEET 01 OF 01			

7
5
2